



GENERAL All materials included in the Metal Building System are in accordance with the manufacturer's standard materials and details unless otherwise specified on the order documents. (MBMA Common Industry Practices 2021, Section 2.1)			MATERIALS Hot-Rolled Mill Sections Structural Steel Plates Structural Steel Bars Cold Formed Light Gauge Shapes Cable Bracing Rod Bracing			ASTM DESIGNATION A 36, A 572, A 992 A 572, A 1011 A 572 or A 529 A 653 Gr. 55 A 475, EHS A 36			MINIMUM YIELD Fy = 36 ksi and/or 50 ksi Fy = 55 ksi Fy = 55 ksi Fy = 55 ksi N/A Fy = 36 ksi			MATERIALS Roof and Wall Sheeting Mild Steel Bolts High Strength Bolts Anchor Rods (If supplied) Pipe and Hollow Structural Sections			ASTM DESIGNATION A 792, Gr. 50 Class 1 A 792, Gr. 80 A 307 F3125: A 325-N A 490-N A 36 A 500 Gr. B			MINIMUM YIELD Fy = 50 ksi Fy = 80 ksi Fy = 36 ksi Fy = 92 or 81 ksi N/A Fy = 36 ksi Fy = 42 ksi, 46 ksi		
DESIGN RESPONSIBILITY The manufacturer is responsible only for the structural design of the Metal Building System it sells to the purchaser / customer. Neither the manufacturer nor the manufacturer's engineer is the design professional or engineer of record for the construction project. The manufacturer is not responsible for the design of any component or materials not sold by it, or their interface and connection with Metal Building System unless such design responsibility is specifically required by the order documents. (MBMA Common Industry Practices 2021, Section 3.1) CSA A660 Manufacturer's Information: Corle Building Systems - CORLE0			FOUNDATION DESIGN AND ANCHOR BOLTS The manufacturer is not responsible for the design, materials, and workmanship of the foundation. The anchor bolt plans prepared by the manufacturer are intended to show only the anchor bolt location, diameter (based on ASTM A36 bolts), and quantity required to connect the Metal Building System to the foundation. (MBMA Common Industry Practices 2021, Section 3.2.2) It is the responsibility of the end customer to ensure that adequate provisions are made for specifying bolt embedment, bearing angles, tie rods, and / or associated items embedded in the concrete foundation, as well as foundation design based on the loads imposed by the Metal Building System, or other imposed loads, and the bearing capacity of the soil and other conditions of the building site. (MBMA Common Industry Practices 2021, Section 3.2.2) U.S. -Anchor bolts shall be accurately set to a tolerance of +/- 1/8 in both elevation and location (AISC Code of Standard Practice for Steel Buildings and Bridges). Canada -Anchor bolts shall be accurately set in accordance with CISC Code of Standard Practice, December 2015, Clause 7.8.1									CORRECTION OF ERRORS AND REPAIRS The correction of minor misfits by the use of drift pins to draw the components into line, shimming, moderate amounts of reaming, chipping, and cutting, and the replacement of minor shortages of material are a normal part of erection and are not subject to claim. (AISC Code of Standard Practice for Steel Buildings and Bridges, June 15, 2016, Section 7.14; CISC Code of Standard Practice, December 2015, Clause 7.15; MBMA Common Industry Practices 2021, Section 6.10).								
ADJACENT EXISTING BUILDINGS The manufacturer does not investigate the influence of the Metal Building System on adjacent existing buildings or structures. The end customer assures that such buildings and structures are adequate to resist snow loads or other conditions as a result of the presence of the Metal Building System. (MBMA Common Industry Practices 2021, Section 3.2.5)			DRAWING DISCREPANCIES In case of discrepancies between the manufacturers steel plans and plans for other trades, the manufacturers steel plans govern. (AISC Code of Standard Practice for Steel Buildings and Bridges, June 15, 2016, Section 3.3; CISC Code of Standard Practice, December 2015, Clause 3.4; MBMA Common Industry Practices 2021, Section 3.1).									F.O.011889								
SHOP-PRIMED STEEL All structural members of the Metal Building System not fabricated of corrosion resistant material or protected by corrosion resistant coating are painted with one coat of shop primer. All surfaces to receive shop primer are cleaned of loose rust, loose mill scale and other foreign matter by using, as a minimum the hand tool cleaning method SSPC-SP2 (Steel Manual, Structures Painting Council) prior to painting. The coat of shop primer is intended to protect the steel framing for only a short period of exposure to ordinary atmospheric conditions. Shop-primed steel should be placed on blocking to prevent contact with the ground, and so positioned as to minimize water holding pockets, dust, mud an other contamination of the primer film. Repairs of damage to primed surfaces and/or removal of foreign material due to improper field storage or site conditions are not the responsibility of the manufacturer. (CISC Code of Standard Practice, December 2015, Clauses 6.8 & 6.9; (MBMA Common Industry Practices 2021, Section 4.2.4).			DELIVERIES Delivery of any material by the manufacturers carrier, a common carrier, or to purchasers/ customers own leased, chartered, or authorized conveyance shall constitute delivery to builder, and thereafter, such material shall be at builders risk. If builder chooses to use its own, or private carrier, it shall be solely responsible for compliance with all applicable government regulations. All charges shall be borne by the builder. The manufacturers responsibility for damage or loss ceases upon delivery of shipment to carrier. The manufacturer will endeavor to deliver on the required date. The manufacturers truck is not considered as being late if deliveries are between 8am - 12pm (morning) and 12pm - 5pm (afternoon). However, the manufacturer cannot be held responsible for circumstances beyond our control. For deliveries via the manufacturers truck, the manufacturer will only honor claims that were approved by the customer service department at the time of delivery. For deliveries via contract carriers, it is the responsibility of the customer to file claims with the carrier. The manufacturer cannot assume any liability for the claim.									REV: DESCRIPTION								
ERECTION-GENERAL The erector, by entering into contract to erect the building, holds itself out as skilled in the erection of Metal Building Systems and is responsible for complying with all applicable local, federal, and state construction and safety regulations including OSHA regulations as well as any applicable requirements of local, national, or international union rules or practices. (CISC Code of Standard Practice, December 2015, Clause 7.3; (MBMA Common Industry Practices 2021, Section 6.9). The erector shall erect the Metal Building System in accordance with the erection drawings, the Erection and Detail Manual (2019), and / or the Seam-Lok Technical - Erection manual (2019) as furnished by the manufacturer. The aforementioned erection information is intended to illustrate the layout of the framing members, provide the associated connection details, and suggests sequence of erection. It is not intended to specify any particular method of erection to be followed by the erector. The erector remains solely responsible for the safety and appropriateness of all techniques and methods utilized by its crews in the erection of the Metal Building System. The erector is responsible for supplying any safety devices such as scaffolds, runways, nets, et, which may be required to safely erect the Metal Building System. (MBMA Common Industry Practices 2021, Section 6.9) The manufacturer expressly disclaims any responsibility for injury to persons in the course of erection or for damages to the product itself. Field erection of a Pre-Engineered Metal Building, as in all construction projects, involves hazards to persons within the area of the construction and risk of damage to the property itself. Only experienced persons who are skilled and qualified in the erection of Metal Building Systems should be permitted to field-erect a building due to the hazards of this construction activity. The manufacturer is not responsible for the erection of the Metal Building System, the supply of any tools or equipment, or any other field work. The manufacturer provides no field supervision for the erection of the structure nor does the manufacturer perform any intermediate or final inspections of the Metal Building System during or after erection. The erector shall furnish temporary guys and bracing where needed for squaring, plumbing, and securing the structural framing against loads, such as wind loads acting on the exposed framing as well as loads due to erection equipment and erection operation, but not including loads resulting from the performance of work by others. Bracing furnished by the manufacturer for the Metal Building System cannot be assumed to be adequate during erection. Temporary supports such as temporary guys, braces, false work, cribbing, or other elements required for the erection operation will be determined, erected, and installed by the erector. (AISC Code of Standard Practice for Steel Buildings and Bridges, June 15, 2016, Section 7.10.3; CISC Code of Standard Practices, December 2015, Clause 1.5; MBMA Common Industry Practices 2021, Section 6.2.1.5).			SHORTAGES The purchaser /customer should make an inspection upon arrival of all building components. The purchaser/customer must note on the freight bill any missing item(s) and notify the manufacturers customer service department immediately; otherwise, the manufacturer cannot be held responsible for any shortages. If any item is damaged, note on the bill of lading and file a claim with the freight agent. Concealed shortages must be reported to the manufacturers customer service department within the following time frames (date from receipt of first delivery), based on the project shipment size, i.e., number of truck loads used in delivery. 1 to 3 loads.....2 weeks 4 loads and over.....3 weeks The manufacturers responsibility for shortages expires at the end of these time periods.									CITY:								
ERECTION TOLERANCES U.S. : Erection tolerances are those set forth in AISC code of standard practice except individual members are considered, plumb, level and aligned if the deviation does not exceed 1/500. (AISC Code of Standard Practice for Steel Buildings and Bridges June 15, 2016 Section 7.13.1; MBMA Common Industry Practices 2021, Section 6.8) Canada: Erection tolerances are those set forth in CISC Code of Standard Practice except individual members are considered plumb, level and aligned if the deviation does not exceed 1/500. (CISC Handbook of Steel Construction, Eleventh Edition, Third Revised Printing, Part 1, Clause 29.3; MBMA Common Industry Practices 2021, Section 6.8)			FABRICATION ERRORS The purchaser/customer is responsible for contacting the customer service department to advise the manufacturer of fabrication problems and corresponding cost estimates. The manufacturer will be responsible for providing the builder with verbal approval to proceed with appropriate field corrections. This will be done in a timely manner. IF THE BUILDER PROCEEDS WITH CORRECTIVE WORK WITHOUT THE MANUFACTURERS APPROVAL, HE DOES SO AT HIS OWN RISK. The manufacturer shall not be responsible for any claims where the purchaser/customer has not documented the problem, its correction, and reasonable costs for repair, and submitted this documentation for payment within 30 days of the occurrence.									FOR APPROVAL: THESE DRAWINGS, BEING FOR APPROVAL, ARE BY DEFINITION NOT FINAL AND ARE FOR CONCEPTUAL REPRESENTATION ONLY. THEY ARE NOT TO BE USED FOR CONSTRUCTION OF THE PROJECT DOCUMENTS, ONLY IF DRAWINGS ISSUED FOR CONSTRUCTION CAN BE CONSIDERED AS COMPLETE.								
BOLT TIGHTENING The proper tightening and inspection of all fasteners is the responsibility of the erector (Reference RCSC for structural joints using high strength bolts; June 11, 2020). All high strength (ASTM F3125, A325, A490) bolts and nuts must be tightened by the "turn-of-the-nut" method unless otherwise specified by the end customer in the contract documents. Inspection of high strength bolt and nut installation by other than the erector must also be specified in the contract documents and the erector is responsible for ensuring that the installation procedures are compatible prior to the start of erection (CISC Handbook of Steel Construction, Eleventh Edition, Third Revised Printing, Part 1, Clause 23.7.2), (MBMA Common Industry Practices 2021, Section 6.9).			INVOICE PAYMENT By acceptance of the materials of services set forth in the invoice, the purchaser/customer agrees to pay the invoice amount within the time period specified on the invoice. AT NO TIME IS IT ACCEPTABLE TO DEDUCT A BACK CHARGE OR SHORTAGE FROM AN INVOICE.									FOR PERMIT: THESE DRAWINGS, BEING FOR PERMIT, ARE BY DEFINITION NOT FINAL AND ARE FOR CONSTRUCTION ONLY. THEY ARE NOT TO BE USED FOR CONSTRUCTION OF THE PROJECT DOCUMENTS, ONLY IF DRAWINGS ISSUED FOR CONSTRUCTION CAN BE CONSIDERED AS COMPLETE.								
			SAFETY PROCEDURES The manufacturer is committed to manufacturing a quality product that can be erected safely. Although good job site practices and a commitment to safety by the erector are beyond the control of the manufacturer, the manufacturer highly recommends the erector provide good, safe working conditions on the job site. The erector should follow all local, state, and federal health and safety regulations at all times. Accident prevention practices should be implemented and each employee should know emergency procedures. The manufacturer also recommends daily meetings to discuss erection safety procedures. For additional information concerning federal health and safety regulations, contact the occupational safety and health administration (osha).									FOR CONSTRUCTION: FINAL DRAWINGS.								
			U.S. Department of Labor Occupational Safety and Health Administration 200 Constitution Avenue, N.W. Washington, DC 20210 www.osha.gov																	
			The manufacturer shall not be responsible for personal injury or property damage as a result of failure to follow all applicable safety regulations and material handling and installation recommendations.																	

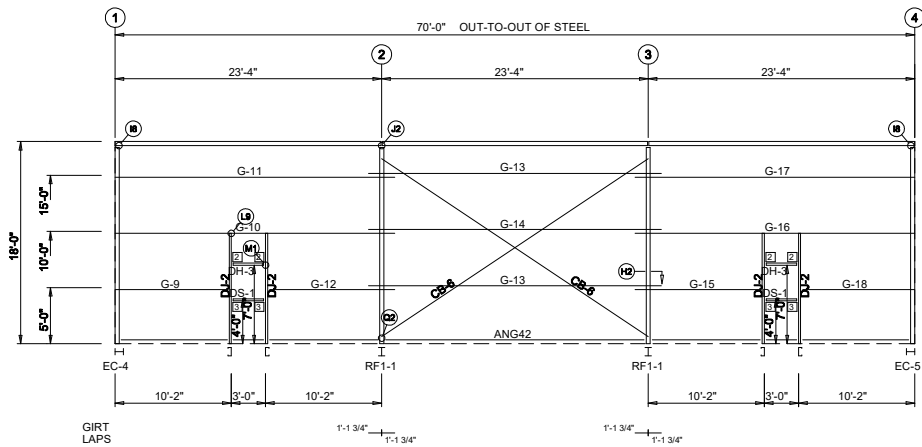

SIDEWALL FRAMING: FRAME LINE A

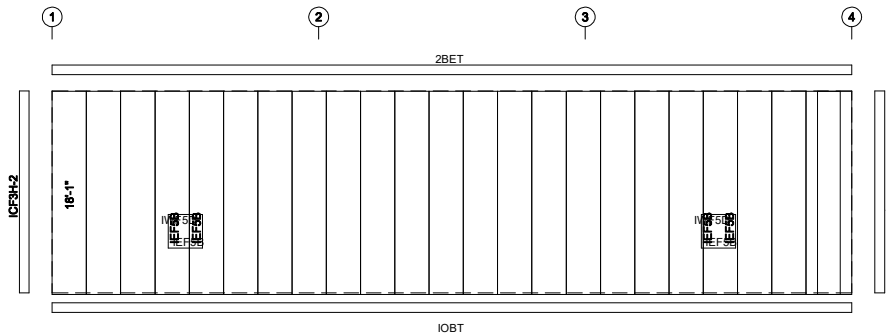

SIDEWALL SHEETING & TRIM: FRAME LINE A

PANELS: 28 Ga. R - TBD

GENERAL NOTES:

1. Use TEK5WW screws in place of SD150 panel screws at all 10 gage members.
2. All connections to door or window jambs where the clip is not designated in the clip table / drawing are made with JC# clips (#= Girt Depth).

DRAWING IS NOT TO SCALE

CONNECTION PLATES		
FRAME LINE A		
ID	QUAN	MARK/PART
2	4	c1
3	4	c2

F.O. 011889

DRAWING STATUS

REVISION HISTORY

FOR APPROVAL: THESE DRAWINGS, BEING FOR APPROVAL, ARE BY DEFINITION NOT FINAL AND ARE FOR CONCEPTUAL REPRESENTATION ONLY. THEIR PURPOSE IS TO CONFIRM PROPER INTERPRETATION OF THE PROJECT'S INTENT AND TO PROVIDE A BASIS FOR CONSTRUCTION. FOR CONSTRUCTION, THESE DRAWINGS CAN BE CONSIDERED AS COMPLETE.

FOR PERMIT: THESE DRAWINGS, BEING FOR PERMIT, ARE BY DEFINITION NOT FINAL. ONLY DRAWINGS ISSUED FOR CONSTRUCTION* CAN BE CONSIDERED AS COMPLETE.

FOR CONSTRUCTION: THESE DRAWINGS, BEING FOR CONSTRUCTION, ARE BY DEFINITION FINAL DRAWINGS.

TRIM COLORS


EAVE TRIM = TBD	CORNER TRIM = TBD
BASE TRIM = TBD	GUTTER =
DOOR TRIM = TBD	DOWNSPOUTS =
RAKE TRIM = TBD	
* LINER TRIM = Liner panel color	
* SOFFIT TRIM = Soffit panel color	
* ONLY APPLICABLE IF LINER TRIM OR SOFFIT PANEL IS INDICATED ON BUILDING ORDER.	

PAGE OF


50'-0" x 70'-0" x 18'-0"

DATE: 3/31/26 REVISION: 0

ENG: XXX DWN: YY APPD: XXX

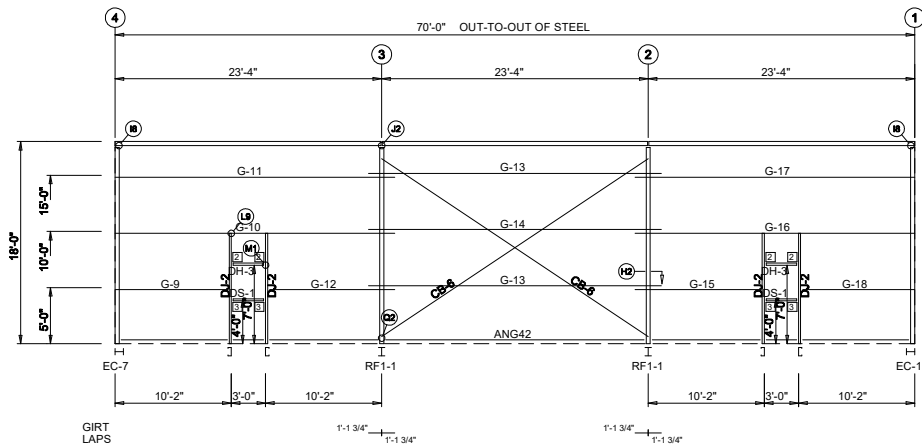

SIDEWALL FRAMING: FRAME LINE F

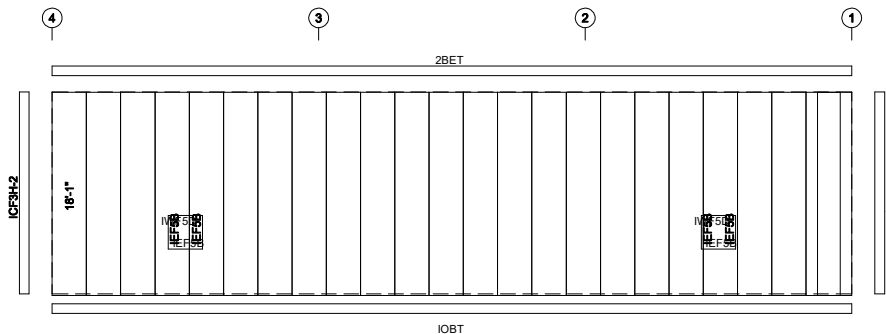

SIDEWALL SHEETING & TRIM: FRAME LINE F

PANELS: 28 Ga. R - TBD

GENERAL NOTES:

1. Use TEK5WW screws in place of SD150 panel screws at all 10 gage members.
2. All connections to door or window jambs where the clip is not designated in the clip table / drawing are made with JC# clips (#= Girt Depth).

DRAWING IS NOT TO SCALE

CONNECTION PLATES FRAME LINE F		
ID	QUAN	MARK/PART
2	4	c1
3	4	c2

F.O. 011889


CITY:	ST / PK:	REVISION HISTORY	
		REV.	DESCRIPTION

FOR APPROVAL: THESE DRAWINGS, BEING FOR APPROVAL, ARE BY DEFINITION NOT FINAL AND ARE FOR CONCEPTUAL REPRESENTATION ONLY. THEIR PURPOSE IS TO CONFIRM PROPER INTERPRETATION OF THE PROJECT'S INTENT AND TO PROVIDE A BASIS FOR CONSTRUCTION. FOR CONSTRUCTION, THESE DRAWINGS CAN BE CONSIDERED AS COMPLETE.


FOR PERMIT: THESE DRAWINGS, BEING FOR PERMIT, ARE BY DEFINITION NOT FINAL. ONLY DRAWINGS ISSUED FOR CONSTRUCTION* CAN BE CONSIDERED AS COMPLETE.

FOR CONSTRUCTION: THESE DRAWINGS, BEING FOR CONSTRUCTION, ARE BY DEFINITION NOT FINAL. ONLY DRAWINGS ISSUED FOR CONSTRUCTION* CAN BE CONSIDERED AS COMPLETE.

TRIM COLORS			
EAVE TRIM	= TBD	CORNER TRIM	= TBD
BASE TRIM	= TBD	GUTTER	=
DOOR TRIM	= TBD	DOWNSPOUTS	=
RAKE TRIM	= TBD		
* LINER TRIM	= Liner panel color		
* SOFFIT TRIM	= Soffit panel color		
* ONLY APPLICABLE IF LINER TRIM OR SOFFIT PANEL IS INDICATED ON BUILDING ORDER.			

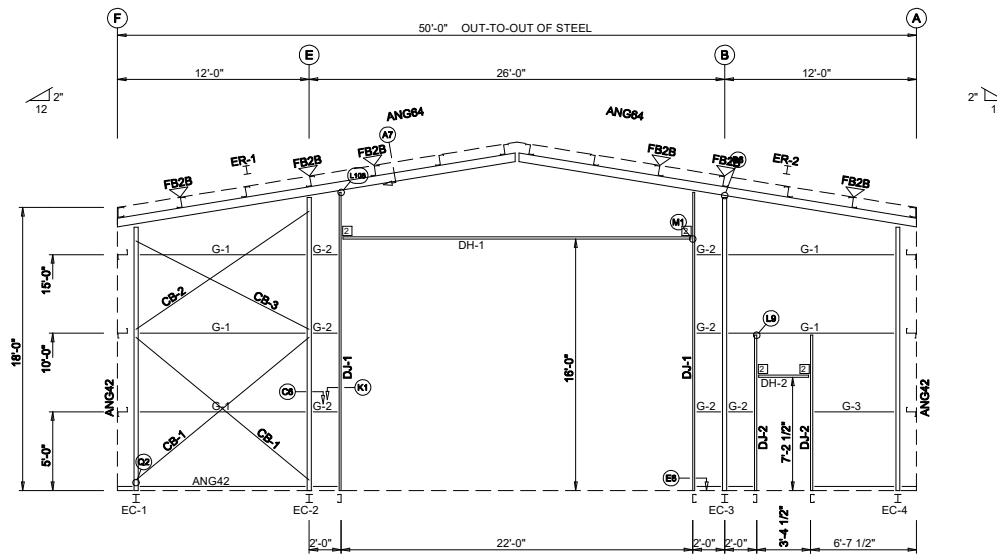

ENDWALL FRAMING: FRAME LINE 1

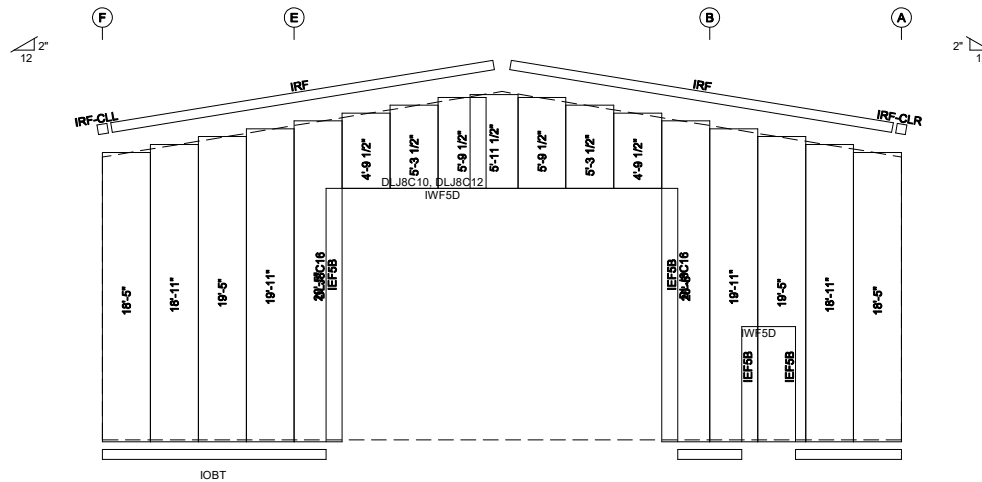

ENDWALL SHEETING & TRIM: FRAME LINE 1

PANELS: 26 Ga. R - TBD

GENERAL NOTES:

1. Use TEK5WW screws in place of SD150 panel screws at all 10 gage members.
2. See detail C7A for field coping of coldform endwall column flange braces.
3. All connections to door or window jambs where the clip is not designated in the clip table / drawing are made with JC# clips (#= Girt Depth).

DRAWING IS NOT TO SCALE

BOLT TABLE FRAME LINE 1

LOCATION	QUAN	TYPE	DIA	LENGTH
ER-1/ER-2	8	A325	1/2"	1 1/2"
Columns/Raf	2	A325	3/4"	1 3/4"
Jamb	2	A325	1/2"	1 1/4"

CONNECTION PLATES FRAME LINE 1

ID	QUAN	MARK/PART
2	4	c1

FLANGE BRACE TABLE FRAME LINE 1

VID	MARK	LENGTH
1	FB2B	1'-3 5/8"

TRIM COLORS			
EAVE TRIM	= TBD	CORNER TRIM	= TBD
BASE TRIM	= TBD	GUTTER	=
DOOR TRIM	= TBD	DOWNSPOUTS	=
RAKE TRIM	= TBD		
* LINER TRIM	= Liner panel color		
* SOFFIT TRIM	= Soffit panel color		
* ONLY APPLICABLE IF LINER TRIM OR SOFFIT PANEL IS INDICATED ON BUILDING ORDER.			

F.O. 011889

CITY: ST/PC: REVISION HISTORY

REV. DESCRIPTION DATE

DRAWING STATUS

FOR APPROVAL: THESE DRAWINGS BEING FOR APPROVAL ARE BY DEFINITION NOT FINAL AND ARE FOR CONCEPTUAL REPRESENTATION ONLY. THEIR PURPOSE IS TO CONFIRM PROPER INTERPRETATION OF THE DESIGN INTENT AND TO IDENTIFY ANY DISCREPANCIES FOR CONSTRUCTION CAN BE CONSIDERED AS COMPLETE.

FOR PERMIT: THESE DRAWINGS BEING FOR PERMIT ARE BY DEFINITION NOT FINAL. ONLY DRAWINGS ISSUED FOR CONSTRUCTION* CAN BE CONSIDERED AS COMPLETE.


FOR CONSTRUCTION: FINAL DRAWINGS.

PAGE OF

50'-0" x 70'-0" x 18'-0"

DATE: 3/31/26 REVISION: 0

ENG: XXX DWN: YY APPD: XXX

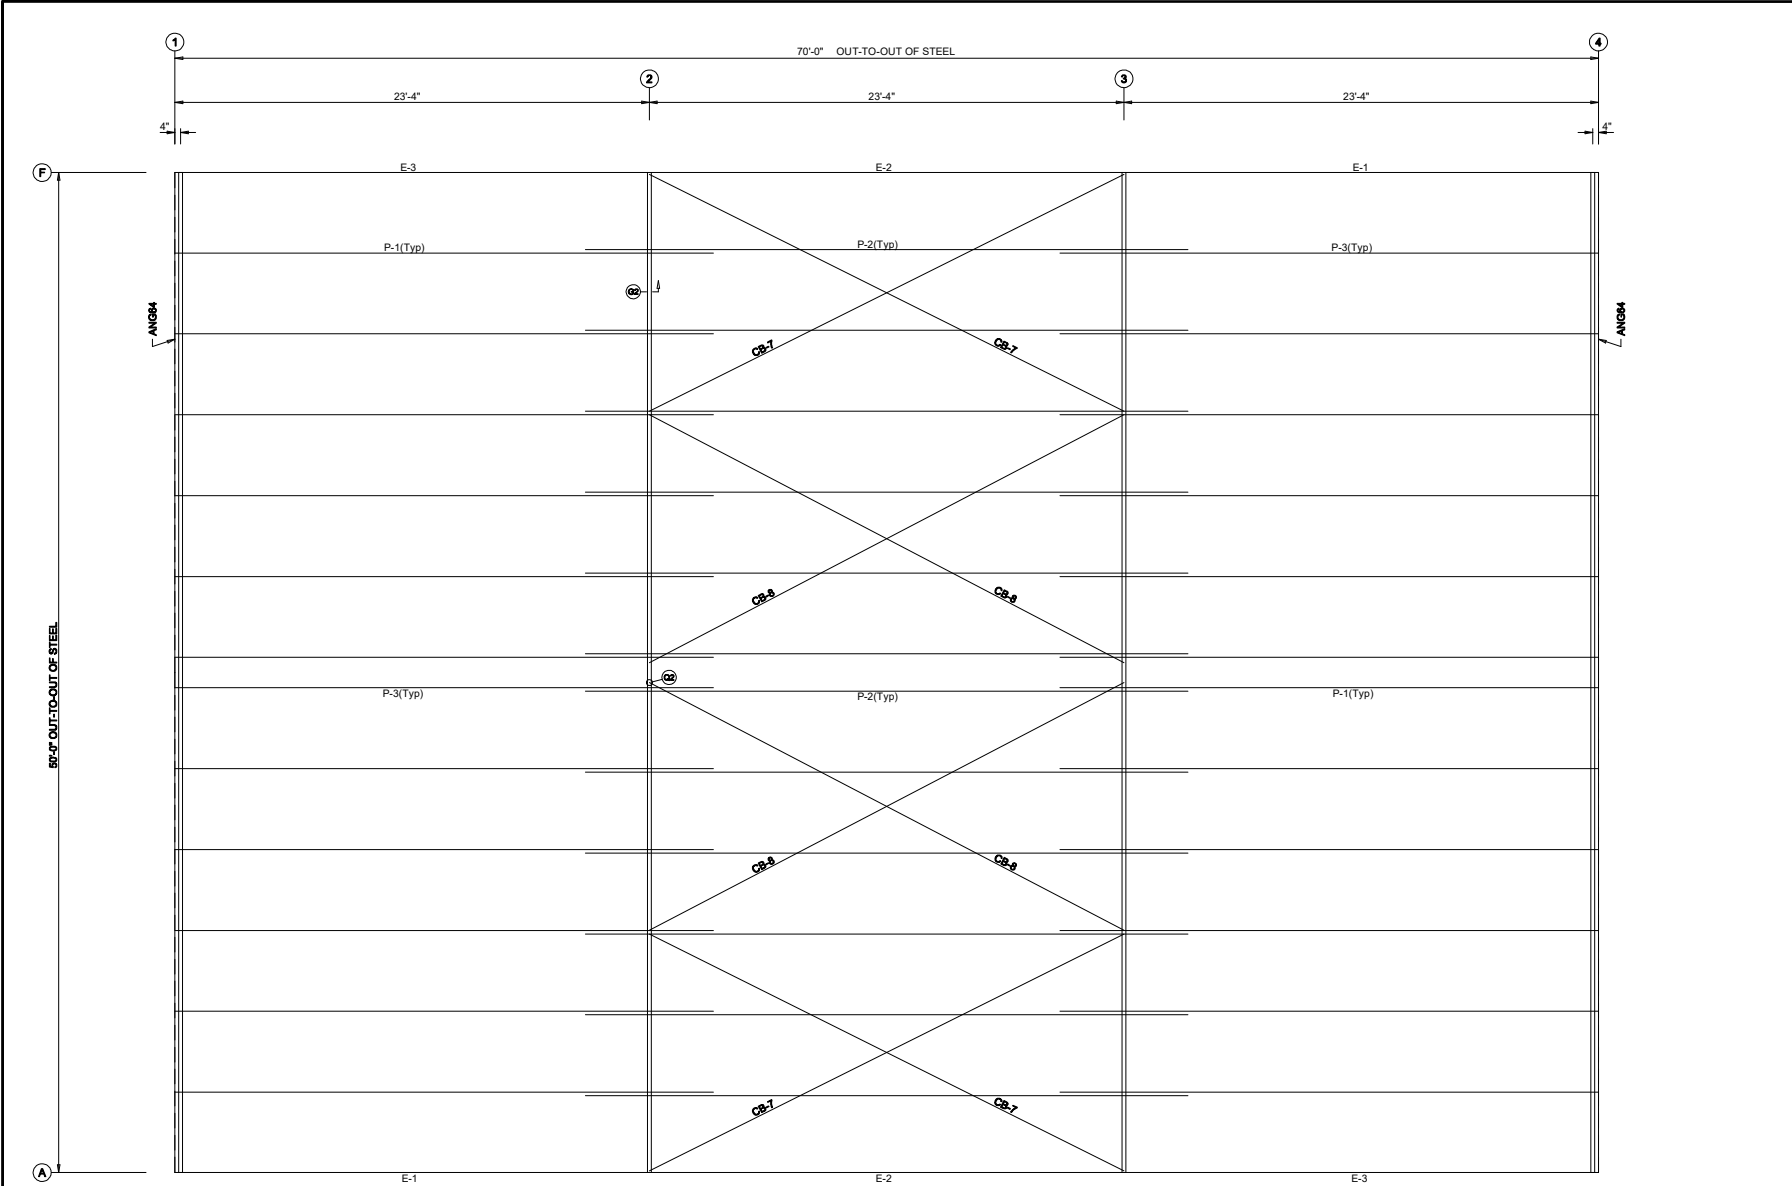

GENERAL NOTES:


1. Screw Down Roof: Use TEK5WW screws in place of SD150 panel screws at all 10 gage purlins, eave struts, or roof joists.

2. Standing Seam Roof: Use FST#6 in place of FST#1 clip to purlin screws at all 10 gage purlins, eave struts, or at roof joists.

ROOF FRAMING PLAN

DRAWING IS NOT TO SCALE

F.O. 011889		50'-0" x 70'-0" x 18'-0"		REVISION: 0		APPD: XXX	
DATE: 3/31/26		ENG: XXX		DWN: YY		APPD: XXX	
DRAWING STATUS							
CITY:		ST / PK:		REVISION HISTORY			
REV:		DESCRIPTION		DATE			
☐ FOR APPROVAL: THESE DRAWINGS, BEING FOR APPROVAL, ARE BY DEFINITION NOT FINAL, AND ARE FOR CONCEPTUAL REPRESENTATION ONLY. THEIR PURPOSE IS TO CONFIRM PROPER INTERPRETATION OF THE DESIGN INTENT AND TO OBTAIN COMMENTS FROM THE CLIENT FOR CONSTRUCTION CAN BE CONSIDERED AS COMPLETE.							
☐ FOR PERMIT: THESE DRAWINGS, BEING FOR PERMIT, ARE BY DEFINITION NOT FINAL. ONLY DRAWINGS ISSUED FOR CONSTRUCTION* CAN BE CONSIDERED AS COMPLETE.							
☐ FOR CONSTRUCTION: THESE DRAWINGS, BEING FOR CONSTRUCTION, CAN BE CONSIDERED AS COMPLETE.							
PAGE		OF					

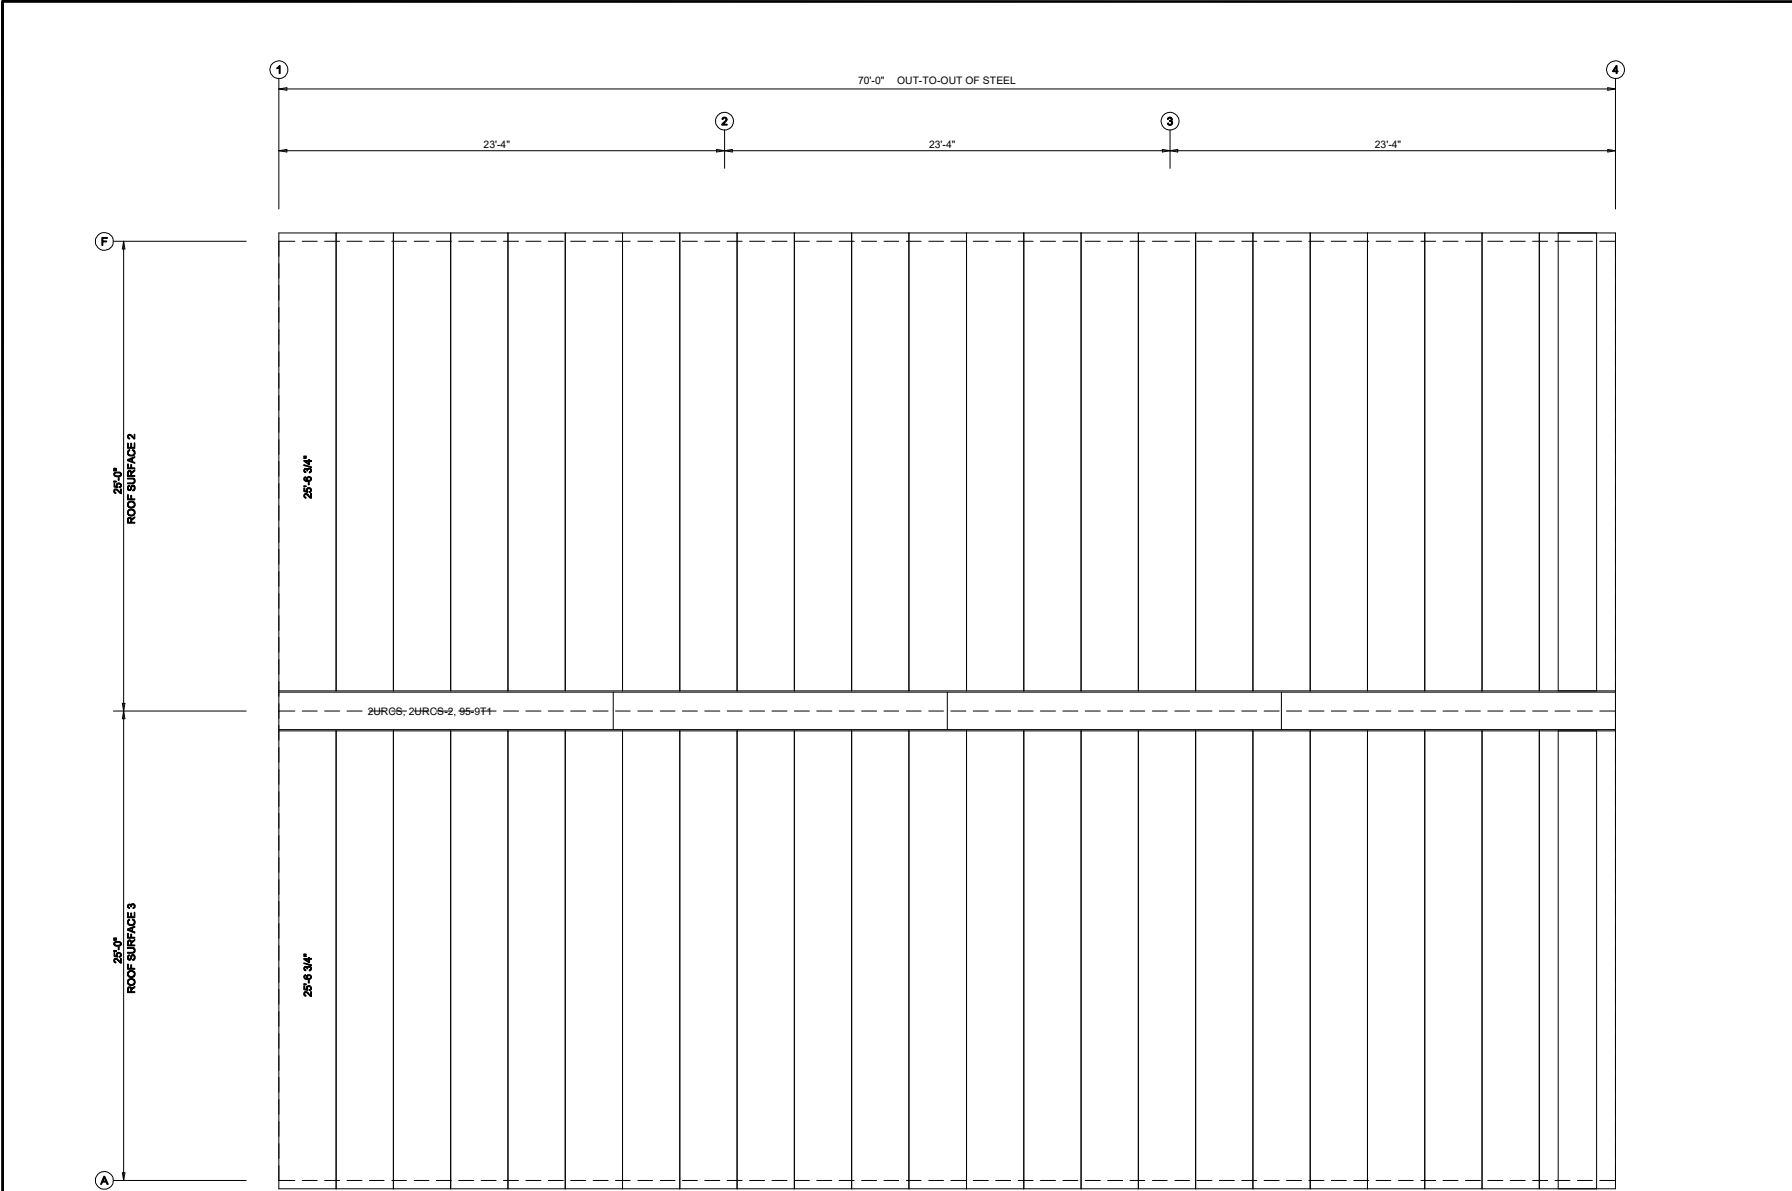

GENERAL NOTES:

Panel "Start" and "End" dimensions must be followed for the proper installation of the gable trim(s) provided.

ROOF SHEETING PLAN
PANEL S: 26 G: R - TBD
DRAWING IS NOT TO SCALE

F.O. 011889

50'-0" x 70'-0" x 18'-0"

DATE: 3/31/26

ENG: XXX

REVISION: 0

DWN: YY

APPD: XXX

DRAWING STATUS

FOR APPROVAL:
THESE DRAWINGS, BEING FOR APPROVAL, ARE BY DEFINITION NOT FINAL, AND ARE FOR CONCEPTUAL REPRESENTATION ONLY. THEIR PURPOSE IS TO CONFIRM PROPER INTERPRETATION OF THE PROJECT REQUIREMENTS AND TO OBTAIN COMMENTS FOR CONSTRUCTION CAN BE CONSIDERED AS COMPLETE.

FOR PERMIT:
THESE DRAWINGS, BEING FOR PERMIT, ARE BY DEFINITION NOT FINAL. ONLY DRAWINGS ISSUED FOR CONSTRUCTION CAN BE CONSIDERED AS COMPLETE.

FOR CONSTRUCTION:
FINAL DRAWINGS.

CITY:

ST / PK:

REV:

DESCRIPTION

DATE

REVISION HISTORY

REV:

DESCRIPTION

DATE

PAGE

OF

▽ FLANGE BRACES: Both Sides(U.N.)
FBxxB(1)
B - L20X1/4
A - L15X1/8



1. See Detail Sheets for Connection Information.
2. See Shipping List for Flange Brace Lengths.


F.O. 011889

PAGE OF

50'-0" x 70'-0" x 18'-0"

DATE: 3/31/26	REVISION: 0
---------------	-------------

ENG: XXX	DWN: YYY	APPD:
----------	----------	-------

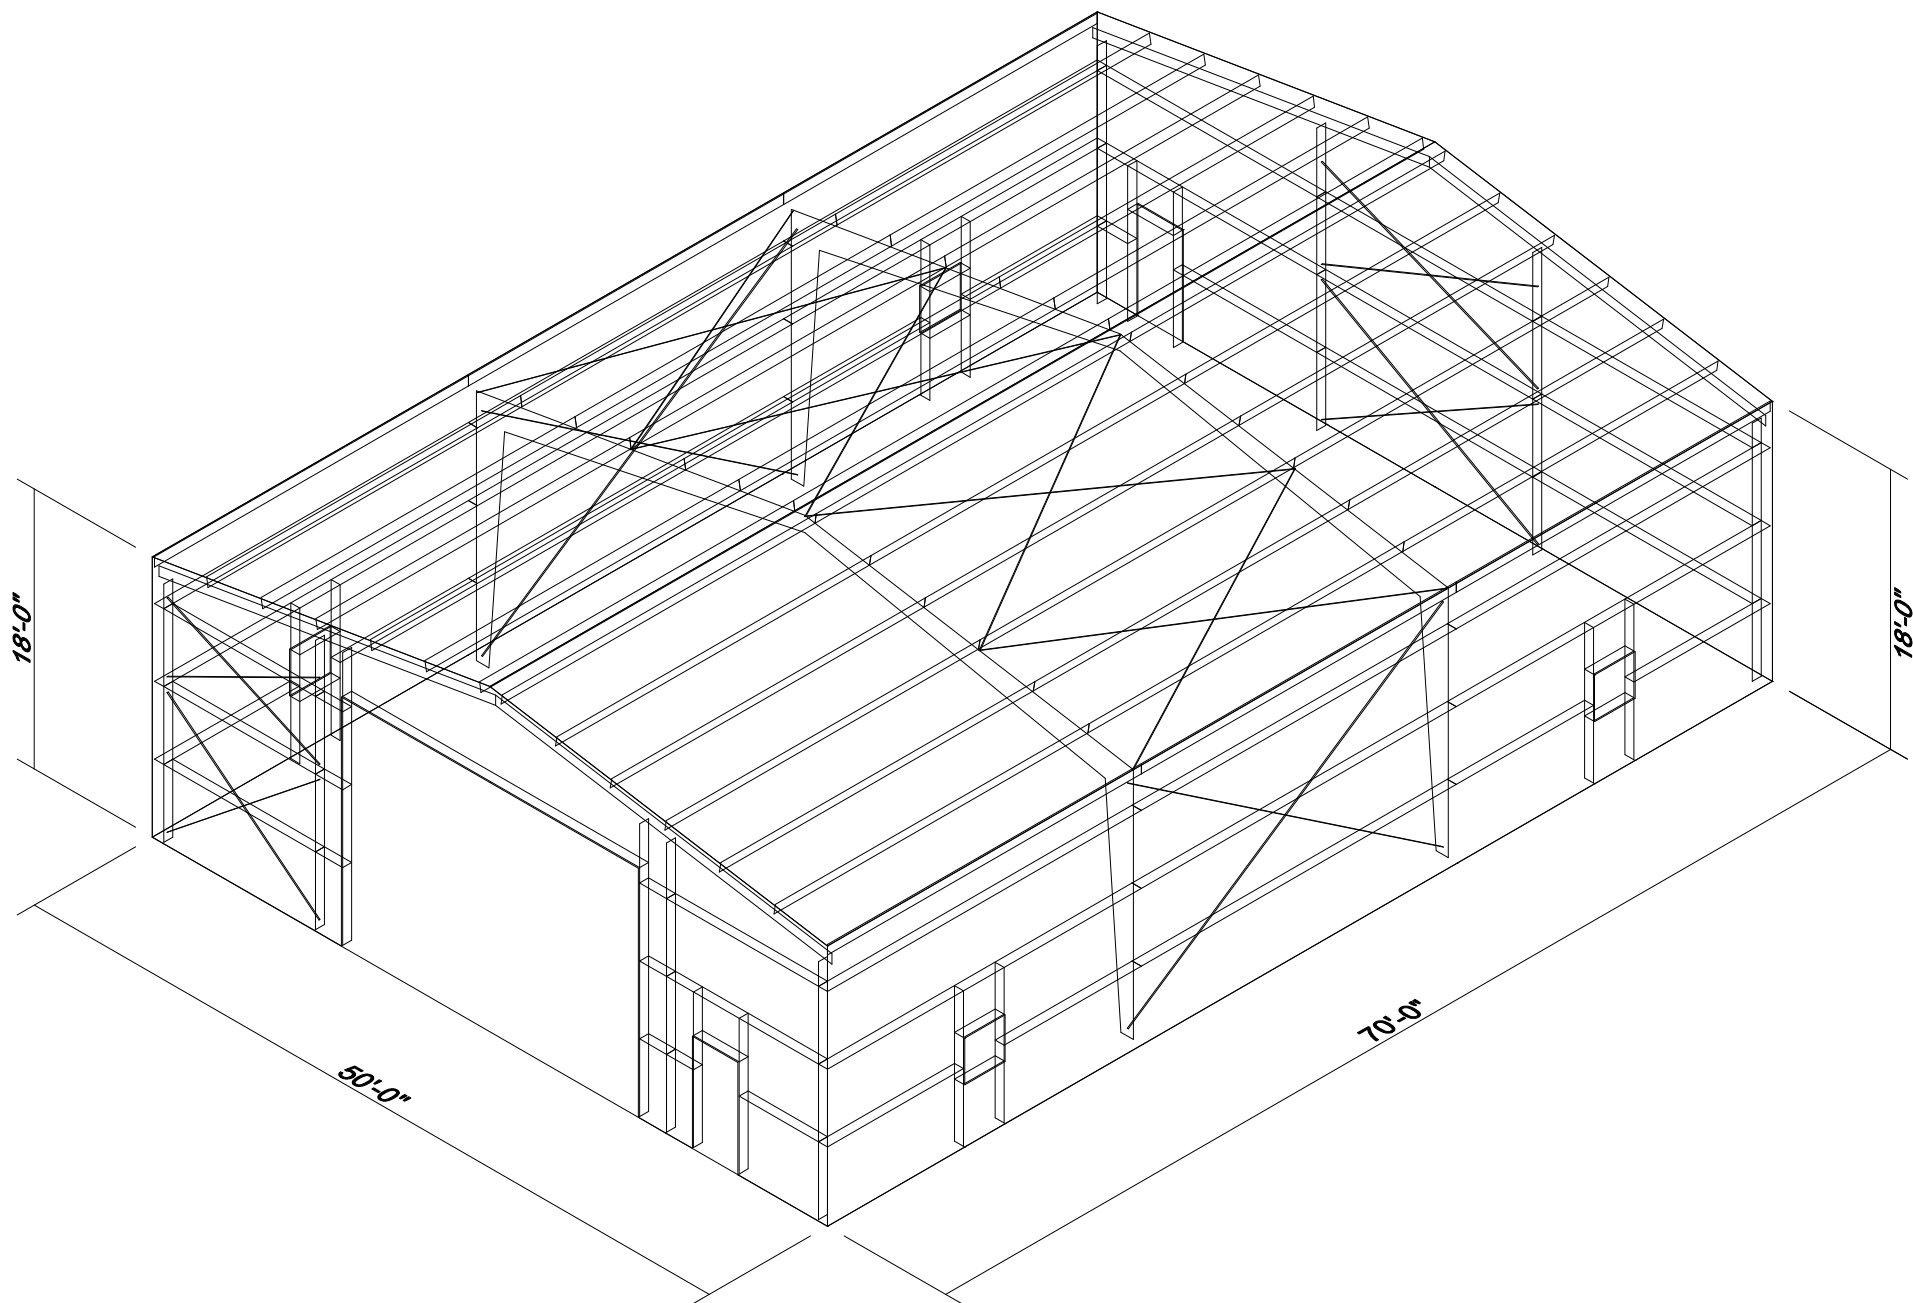


LEGEND

BSW

LEW

REW

FSW

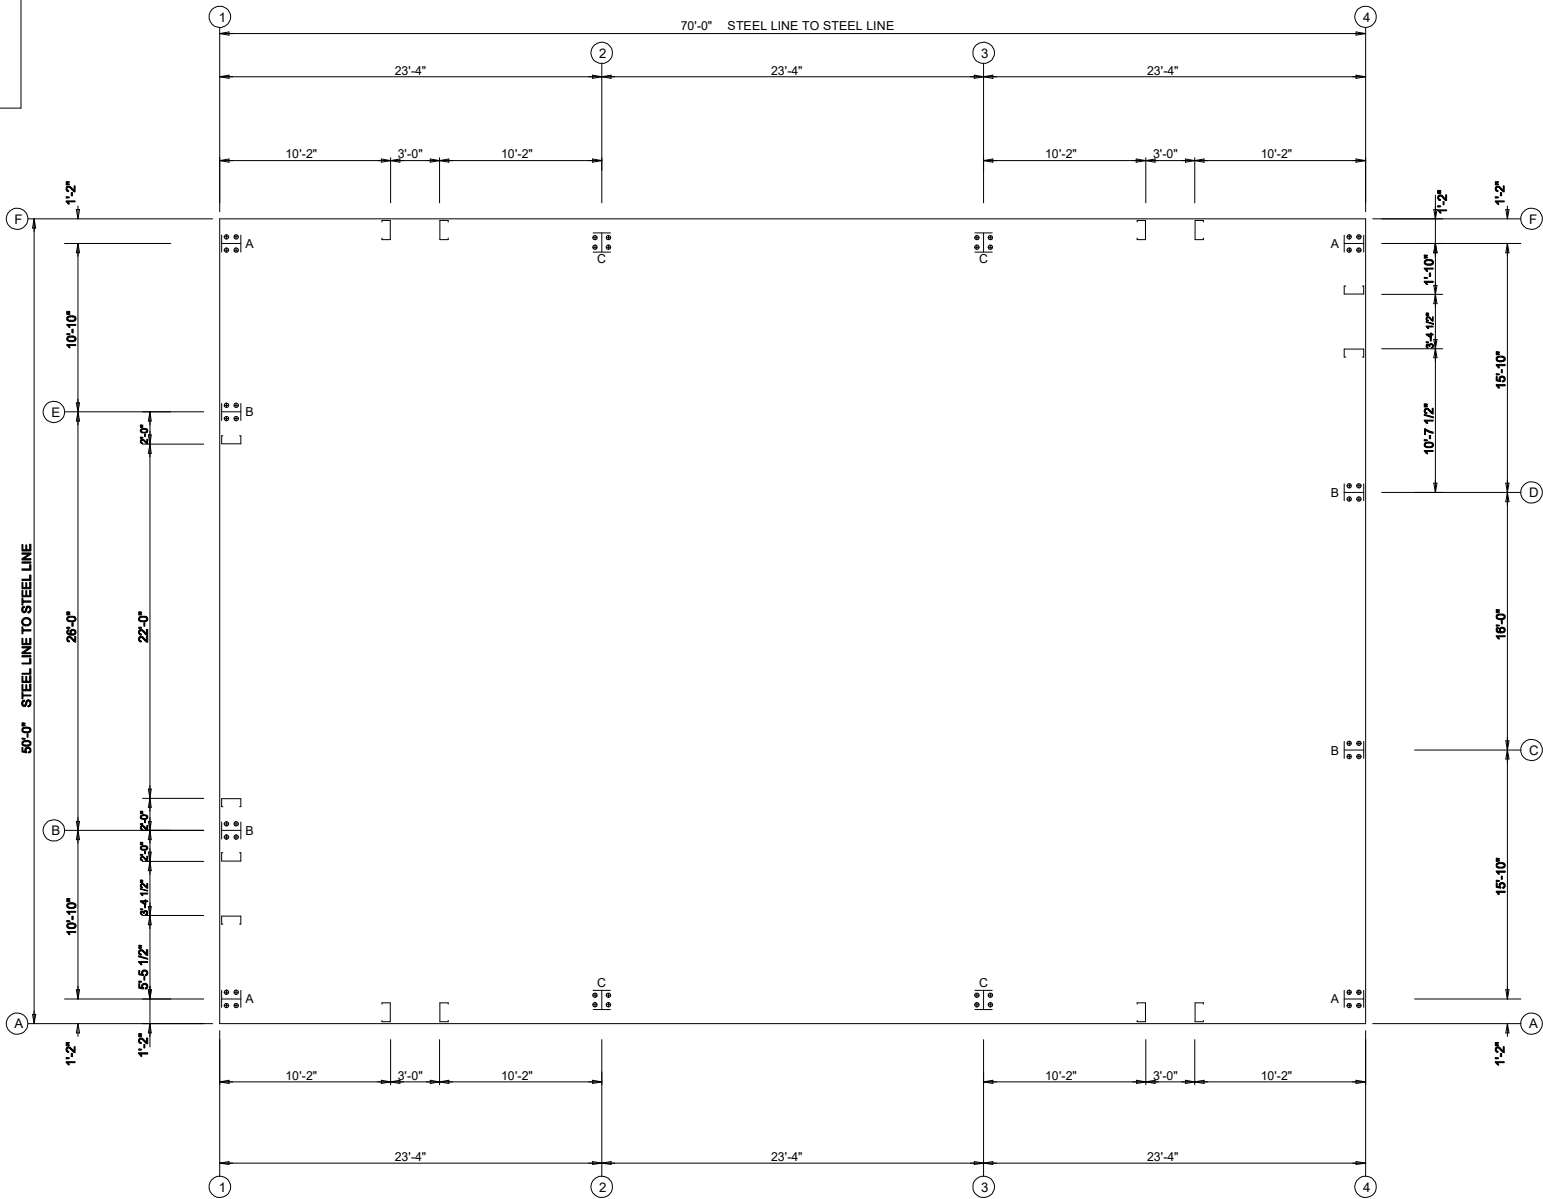

50'-0" x 70'-0" x 18'-0"

DATE: 3/31/26

REVISION: 0

ENG: XXX

DWN: YY

APPD: XXX

F.O. 011889

DRAWING STATUS

CITY:

ST / PK:

REVISION HISTORY

REV.

DESCRIPTION

DATE

FOR APPROVAL:

THESE DRAWINGS, BEING FOR APPROVAL, ARE BY DEFINITION NOT FINAL AND ARE FOR CONCEPTUAL REPRESENTATION ONLY. THEIR PURPOSE IS TO CONFIRM PROPER INTERPRETATION OF THE DESIGN INTENT AND TO IDENTIFY ANY OMISSIONS OR CONFLICTS THAT MAY ARISE PRIOR TO CONSTRUCTION. THEY ARE NOT TO BE USED FOR CONSTRUCTION.

FOR PERMIT:


THESE DRAWINGS, BEING FOR PERMIT, ARE BY DEFINITION NOT FINAL. ONLY DRAWINGS ISSUED FOR CONSTRUCTION CAN BE CONSIDERED AS COMPLETE.

FOR CONSTRUCTION:

FINAL DRAWINGS.

PAGE

OF

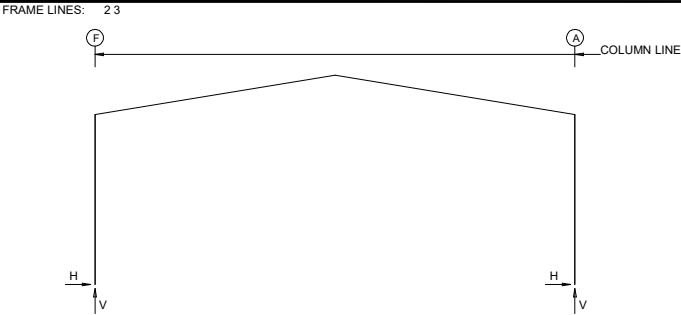

RIGID FRAME: BASIC COLUMN REACTIONS (k)

Frame Line	Column Line	----Dead----	----Collateral----	----Live----	----Snow----	--Wind_Left1--	--Wind_Right1--
2" F	1.0	Horz 2.6	Horz 0.8	Horz 12.2	Horz 7.7	Horz 17.6	Horz -4.7
2" A	-1.0	Vert 2.6	Vert 1.8	Vert 12.2	Vert -7.7	Vert 17.6	Vert -9.2
2" F	-4.3	--Wind_Left2--	--Wind_Right2--	--Wind_Long1--	--Wind_Long2--	--Seismic_Left--	--Seismic_Right--
2" A	-0.2	Horz -2.0	Horz 0.2	Horz -10.1	Horz -1.0	Horz -1.6	Horz 1.6
		Vert 0.8	Vert 4.3	Vert -9.0	Vert 0.5	Vert -1.1	Vert 1.1
2" F	0.0	Seismic_Long1	Seismic_Long2	F1UNB_SL_L	F1UNB_SL_R		
2" A	0.0	Horz -4.0	Horz 0.0	Horz 5.8	Horz 5.8		
		Vert -4.0	Vert 4.0	Vert 15.4	Vert 10.9		
2" Frame lines:		2	3				

RIGID FRAME: ANCHOR BOLTS & BASE PLATES

Frm Line	Col Line	Anc. Bolt Qty	Dia	Base Plate (in) Width	Length	Thick	ARE/BRE (in)
2" F	4	0.750	8.000	11.56	0.500	0.0	
2" A	4	0.750	8.000	11.56	0.500	0.0	
2" Frame lines:		2	3				

50'-0" x 70'-0" x 18'-0"

DATE: 3/31/26

ENG: XXX

REVISION: 0

DWN: YY

APPD: XXX

F.O.011889

DATE

CITY:

ST / PK:

REV.

DESCRIPTION

DRAWING STATUS

FOR APPROVAL: THESE DRAWINGS BEING FOR APPROVAL ARE BY DEFINITION NOT FINAL AND ARE FOR CONCEPTUAL REPRESENTATION ONLY. THEIR PURPOSE IS TO CONFIRM PROPER INTERPRETATION OF THE PROJECT REQUIREMENTS AND TO OBTAIN COMMENTS FOR CONSTRUCTION CAN BE CONSIDERED AS COMPLETE.

FOR PERMIT: THESE DRAWINGS BEING FOR PERMIT ARE BY DEFINITION NOT FINAL. ONLY DRAWINGS ISSUED FOR CONSTRUCTION CAN BE CONSIDERED AS COMPLETE.

FOR CONSTRUCTION: FINAL DRAWINGS.

PAGE

OF

ENDWALL COLUMN:

BASIC COLUMN REACTIONS (k)

Frm Line	Col Line	Dead Vert	Collat Vert	Live Vert	Snow Vert	Wind_Left1 Horz	Wind_Left1 Vert	Wind_Right1 Horz	Wind_Right1 Vert	Wind_Left2 Horz	Wind_Left2 Vert	Wind_Right2 Horz	Wind_Right2 Vert	Wind Press Horz
1	F	0.3	0.1	0.5	0.7	-1.5a	-3.2	0.0	2.3	-1.5a	-2.5	0.0	2.9	-0.7
1	E	1.3	0.8	5.7	8.2	0.0	-2.9	1.5a	-6.6	0.0	0.1	1.5a	-3.6	-2.3
1	B	1.3	0.8	5.7	8.2	0.0	-3.7	0.0	-5.5	0.0	-0.8	0.0	-2.5	-2.3
1	A	0.3	0.1	0.5	0.7	0.0	-0.6	0.0	-0.6	0.0	0.1	0.0	0.1	-0.7

Frm Line	Col Line	Wind Suct Horz	Wind_Long1 Vert	Wind_Long2 Vert	Seis_Left Horz	Seis_Left Vert	Seis_Right Horz	Seis_Right Vert	Seis Long Horz	E1UNB_SL_L- Vert				
1	F	0.6	0.0	-0.3	-0.4a	-1.2	-1.8a	-3.0	0.0	3.3	0.0	0.0	1.0	0.0
1	E	1.6	0.4a	-5.7	0.0	-2.9	0.0	2.9	1.8a	-3.2	0.1	0.0	7.5	0.0
1	B	1.6	0.0	-3.6	0.0	-5.0	0.0	0.1	0.0	-0.1	0.1	0.0	4.8	0.0
1	A	0.6	0.0	-0.6	0.0	-1.0	0.0	-0.1	0.0	0.1	0.0	0.0	0.1	0.0

Frm Line	Col Line	E1UNB_SL_R- Vert	
1	F	0.0	0.1
1	E	0.0	4.8
1	B	0.0	7.5
1	A	0.0	0.9

Frm Line	Col Line	Dead Vert	Collat Vert	Live Vert	Snow Vert	Wind_Left1 Horz	Wind_Left1 Vert	Wind_Right1 Horz	Wind_Right1 Vert	Wind_Left2 Horz	Wind_Left2 Vert	Wind_Right2 Horz	Wind_Right2 Vert	Wind Press Horz
4	A	0.5	0.3	1.8	2.5	0.0	-1.8	0.0	-1.4	0.0	-0.4	0.0	-0.1	-1.0
4	C	1.0	0.6	4.4	6.4	-1.5a	-6.3	0.0	-0.9	-1.5a	-4.0	0.0	1.4	-2.1
4	D	1.0	0.6	4.4	6.4	0.0	-0.9	1.5a	-6.3	0.0	1.4	1.5a	-4.0	-2.1
4	F	0.5	0.3	1.8	2.5	0.0	-1.4	0.0	-1.8	0.0	-0.1	0.0	-0.4	-1.0

Frm Line	Col Line	Wind Suct Horz	Wind_Long1 Vert	Wind_Long2 Vert	Seis_Left Horz	Seis_Left Vert	Seis_Right Horz	Seis_Right Vert	Seis Long Horz	E2UNB_SL_L- Vert				
4	A	0.8	0.0	-2.1	0.0	-1.4	0.0	0.1	0.0	0.0	0.0	0.0	2.5	0.0
4	C	1.5	0.0	-3.6	-0.4a	-3.0	-1.8a	-2.3	0.0	2.2	0.1	0.0	6.3	0.0
4	D	1.5	0.4a	-3.0	0.0	-3.6	0.0	2.2	1.8a	-2.3	0.1	0.0	3.3	0.0
4	F	0.8	0.0	-1.4	0.0	-2.1	0.0	0.0	0.0	0.1	0.0	0.0	1.3	0.0

Frm Line	Col Line	E2UNB_SL_R- Vert	
4	A	0.0	1.3
4	C	0.0	3.3
4	D	0.0	6.3
4	F	0.0	2.5

a - Out-of-Plane to column web reaction

ANCHOR BOLT SUMMARY

	Qty	Locate	Dia (in)	Type
⊕	32	Endwall	3/4"	
⊕	16	Frame	3/4"	

BUILDING BRACING REACTIONS

				Reactions in plane of wall + Reactions(k)				Panel Shear (lb/ft)	
---	Wall	---	Col Line	---	Wind	---	Seismic	---	
Loc	Line		Line		Horz	Vert	Horz	Vert	Wind Seis
L_EW	1	F,E		Bracing, see EW reactions					
F_SW	A	2.3		2.9		5.9			
R_EW	4	C,D		Bracing, see EW reactions					
B_SW	F	3.2		2.9		5.9			

*See RF reactions table for vertical and horizontal reactions in plane of the rigid frame.

Reactions for seismic represent shear force, V
Reaction values shown are unfactored

ENDWALL COLUMN:

ANCHOR BOLTS & BASE PLATES

Frm Line	Col Line	Anc. Qty	Bolt Dia	Base_Plate Width	(in) Length	Thick	ARE/BRE (in)
1	F	4	0.750	6.000	7.875	0.375	0.0
1	E	4	0.750	6.000	7.875	0.375	0.0
1	B	4	0.750	6.000	7.875	0.375	0.0
1	A	4	0.750	6.000	7.875	0.375	0.0
4	A	4	0.750	6.000	7.875	0.375	0.0
4	C	4	0.750	6.000	7.875	0.375	0.0
4	D	4	0.750	6.000	7.875	0.375	0.0
4	F	4	0.750	6.000	7.875	0.375	0.0

Reaction Type	Description
Collateral	Collateral Load
Snow	Uniform Roof Snow Load
Wind_Right1	Transverse Wind From Right With Internal Pressure
Wind_Right2	Transverse Wind From Right With Internal Suction
Wind_Long2	Longitudinal Wind From Right Endwall
Wind_Suct	Wind Suction Applied Away From Endwall
Seismic_Right	Seismic Load Applied From Right
F# Unb_SL_L	Unbalanced Snow Load On Left
F# PAT_SL#	Pattern Snow Load
Sliding	Sliding Snow Load

50'-0" x 70'-0" x 18'-0"

REVISION: 0

DATE: 3/31/26


DWN: YY

APPD: XXX

F.O.011889

PAGE

OF

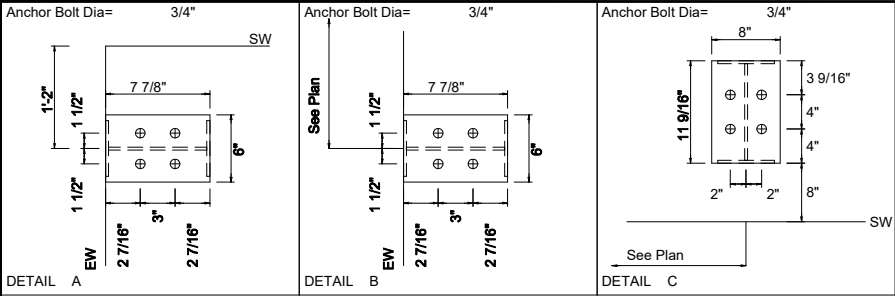

DRAWING IS NOT TO SCALE

F.O. 011889	
REVISION HISTORY	
REV.	DESCRIPTION
DATE	
DRAWING STATUS	
CITY:	ST / PK:
☐ FOR APPROVAL: THESE DRAWINGS BEING FOR APPROVAL ARE BY DEFINITION NOT FINAL AND ARE FOR CONCEPTUAL REPRESENTATION ONLY. THEIR PURPOSE IS TO CONFIRM PROPER INTERPRETATION OF THE PROJECT AND TO BE USED FOR PERMITTING PURPOSES. FOR CONSTRUCTION CAN BE CONSIDERED AS COMPLETE.	
☐ FOR PERMIT: THESE DRAWINGS BEING FOR PERMIT ARE BY DEFINITION NOT FINAL. ONLY DRAWINGS ISSUED FOR CONSTRUCTION CAN BE CONSIDERED AS COMPLETE.	
☐ FOR CONSTRUCTION: FINAL DRAWINGS.	
PAGE OF	

50'-0" x 70'-0" x 18'-0"
DATE: 3/31/26
ENG: XXX
DWN: YY
APPD: XXX
REVISION: 0